

## Neo-906 DOOR SYSTEM

### Door Frame Conceal System [AM]


- Small sensor stick onto door frame, easy installation.
- Protect maximum 2.5m height and 3.5m width.
- LED light on when tag passing by.
- Big volume buzzer, strong notification when alarming.
- 1 controller connect maximum 6 sensors.
- Software adjustment and remote tuning system.



|                                      |  |
|--------------------------------------|--|
| Neo-906 Controller<br>(380*214*75mm) |  |
| Neo-906 Sensor<br>(118*38*22mm)      |  |
| Neo-906 Loop<br>(RV 3*1.0)           |  |


# Neo-906

## Connection

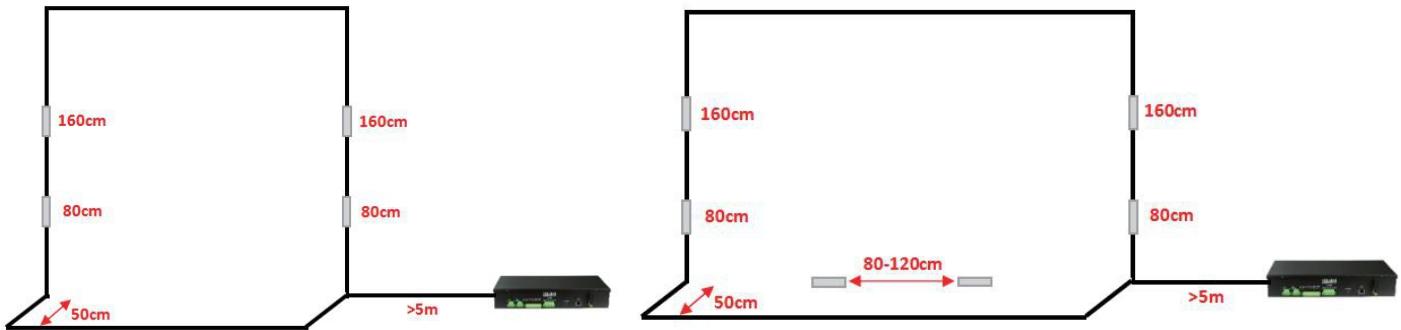

- For Exit Max. 2.5m height and 2m width. 4 sensors.
- For Exit Max. 2.5m height and 3.5m width. 6 sensors.

## Software Page

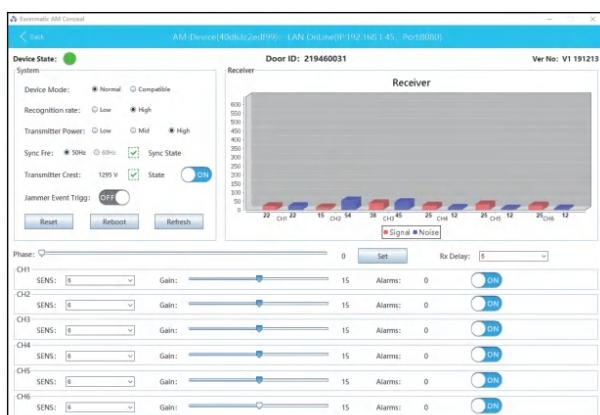

## Specification

|                        |                                   |
|------------------------|-----------------------------------|
| Model                  | Neo-906                           |
| Frequency              | 58Khz                             |
| Max. Power Consumption | 70W                               |
| Max. Current           | (120V)0.32A/(240V)0.16A           |
| Fuse                   | 2A, 250V Delay Fuse               |
| Working Temperature    | 0-50 C                            |
| Working Humidity       | 0-90%                             |
| Operating Voltage      | 100-120VAC 60Hz / 220-240VAC 50Hz |